




DS-560series

Digital Weighing Platform Scale

Compact Design! Splash Proof!

Selectable automatic shut off time
Intelligent power control
Rechargeable battery for 40 hours(option)
kg/lb Conversion

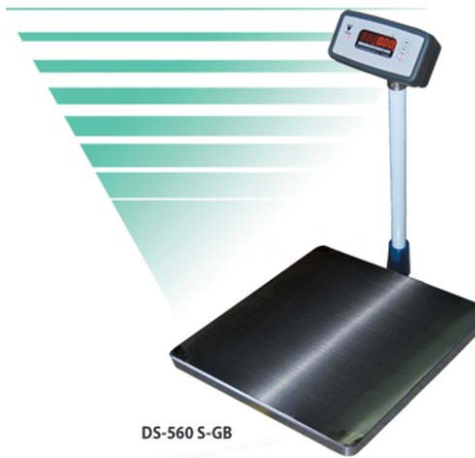

DS-560 S-GB



(株)デジアイズ

CERTIFIED
MANAGEMENT SYSTEM
JQA
ISO 9001
ISO 14001
JQA-QM3646
JQA-EM1220

MS
JAB
CM009

	S-SK	S-SKS	S-TK
A	87	82	95
B		250	346
C		352	451
D		318	415
E		420	520
F		583	686

ロングボールタイプ 全高 924mm
ショートボールタイプ 全高 589mm

3 year
warranty


**OFFICIAL
WARRANTY**
DIGI®

※S-SKとS-SKSタイプ、S-TKとS-TKSタイプはそれぞれサイズが同じ為、

Searching for
a New Balance

*Various Platform:S-GA/S-GB/S-GC/S-GD/S-GH/S-UK(optional)

External Dimensions(mm)

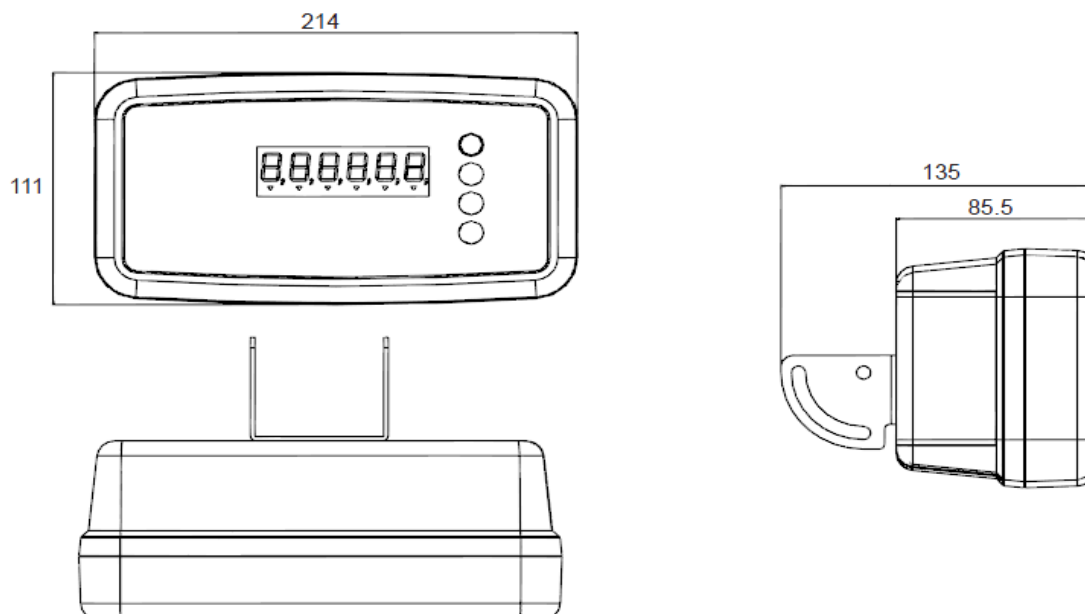

Basic Specifications


Model	DS-560
Capacity	1.5kg, 3kg, 6kg, 15kg, 30kg, 60kg, 150kg, 300kg, 600kg
Power Source	AC 240/230/220V, 117/100V(Factory Option) DC 6V 2.8Ah rechargeable battery (optional)
Display	LED
Resolution	1/3,000
Operating Temperature	-10°C ~ +40°C
Operating Humidity	15% ~ 85% RH
Power Consumption	18W (when using AC power) 3W (when using rechargeable battery)
Dimensions	214 (W) x 135 (D) x 111 (H) mm

	S-GA	Weighing Max:60\150\300(kg) Platform Dimensions:360 x 480mm Dimensions:360(W) x 480(D) x 96(H)mm * Full Stainless Steel (optional)	S-GC	Weighing Max:150\300\600(kg) Platform Dimensions:700 x 800mm Dimensions:700(W) x 800(D) x 125(H)mm * Full Stainless Steel(optional)
	S-GB	Weighing Max:60\150\300(kg) Platform Dimensions:500 x 600mm Dimensions:500(W) x 600(D) x 100(H)mm * Full Stainless Steel (optional)	S-UK	Weighing Max:60\150\300(kg) Platform Dimensions:700 x 598mm Dimensions:700(W) x 598(D) x 116(H)mm * Full Stainless Steel(optional)
	S-GD	Weighing Max:30\60\150(kg) Platform Dimensions:350 x 400mm Dimensions:350(W) x 400(D) x 102(H)mm * Stainless Steel Platform (optional)	S-RK	Plat Size 80x80cm / 1x1m / 1.2x1.2m / 1.5x1.5m
	S-GH	Weighing Max:60\150\300(kg) Platform Dimensions:450 x 500mm Dimensions:450(W) x 500(D) x 98(H)mm * Full Stainless Steel (optional)		

Teraoka Seiko Co., Ltd.

13-12 Kugahara 5-chome, Ohta-ku,
Tokyo 146-8580
Japan

TEL: +81-3-3752-2131
FAX: +81-3-3752-2801

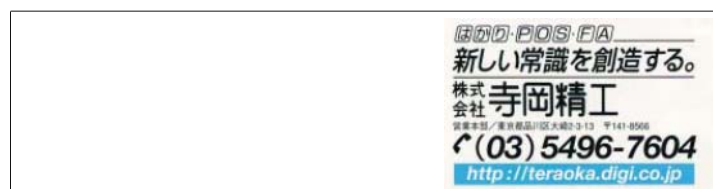

※記載内容については、予告なしに変更する場合があります。
※本カタログに記載されている内容は平成21年8月現在のものです。
※記載製品の写真は印刷のため、実物の色とは多少異なる場合があります。

450500220
D0908K5##